



NUMBER: B102R1106-0

DATE: JAN. 10, 1992

SUPERSEDES:

SERVICE BULLETIN

Effective Serial Number: All Units - Chance Rides, Inc.
All Units - Chance Manufacturing Co., Inc.

Chance Rides, Inc. SPECIFICALLY DISCLAIMS ANY
LIABILITY for losses associated with rides
produced by Chance Manufacturing Company, Inc.

Ride: C.P. HUNTINGTON Subject: Safety Decals

Chance Rides, Inc. is aware that it is possible for passenger's hands arms and/or feet to come into contact with stationary or other moving objects while riding on the C.P. HUNTINGTON train. This could result in possible injury to the passenger. Chance Rides, Inc. has designed safety decals to warn passengers to keep their hands, arms and feet inside the coach area while the train is in motion.

All owner/operators of C.P. HUNTINGTON trains are required to order, install and return the attached Certification Of Compliance within fifteen (15) days from receipt of parts. Order the correct number of parts required, as outlined in this bulletin. All parts are offered at no charge when ordered within 90 days of the date on this bulletin. Follow the installation instruction in this bulletin for installing each of the following parts.

PARTS LIST

<u>QUANTITY</u>	<u>DESCRIPTION</u>	<u>DP NUMBER</u>
7 per coach	Safety Decal	22197505
1 per each coach railing which has a seating facing it	Backing Plate (For mounting decal to railing)	30851521
3 per each backing plate	3/16" Rivet (For mounting backing plate to front railing)	66166200

All work must be performed by qualified personnel, capable of understanding the function of the parts and their proper installation.


NOTICE

Use only those components authorized, specified or provided by Chance Rides, Inc.

Chance Rides, Inc. SPECIFICALLY DISCLAIMS ANY LIABILITY for losses associated with any unauthorized alterations and/or modifications or additions and installations of unauthorized components.

SAFETY DECAL INSTALLATION INSTRUCTIONS ON COACHES WITH HEAT SHIELDS

1. Apply one decal to the back of the first six (6) seat backs. Decals must be centered on the top seat slat as shown in the following illustration.
2. Apply one decal to the back side of the heat shield. Position decal near the top and centered on the shield, as shown in the following illustration.

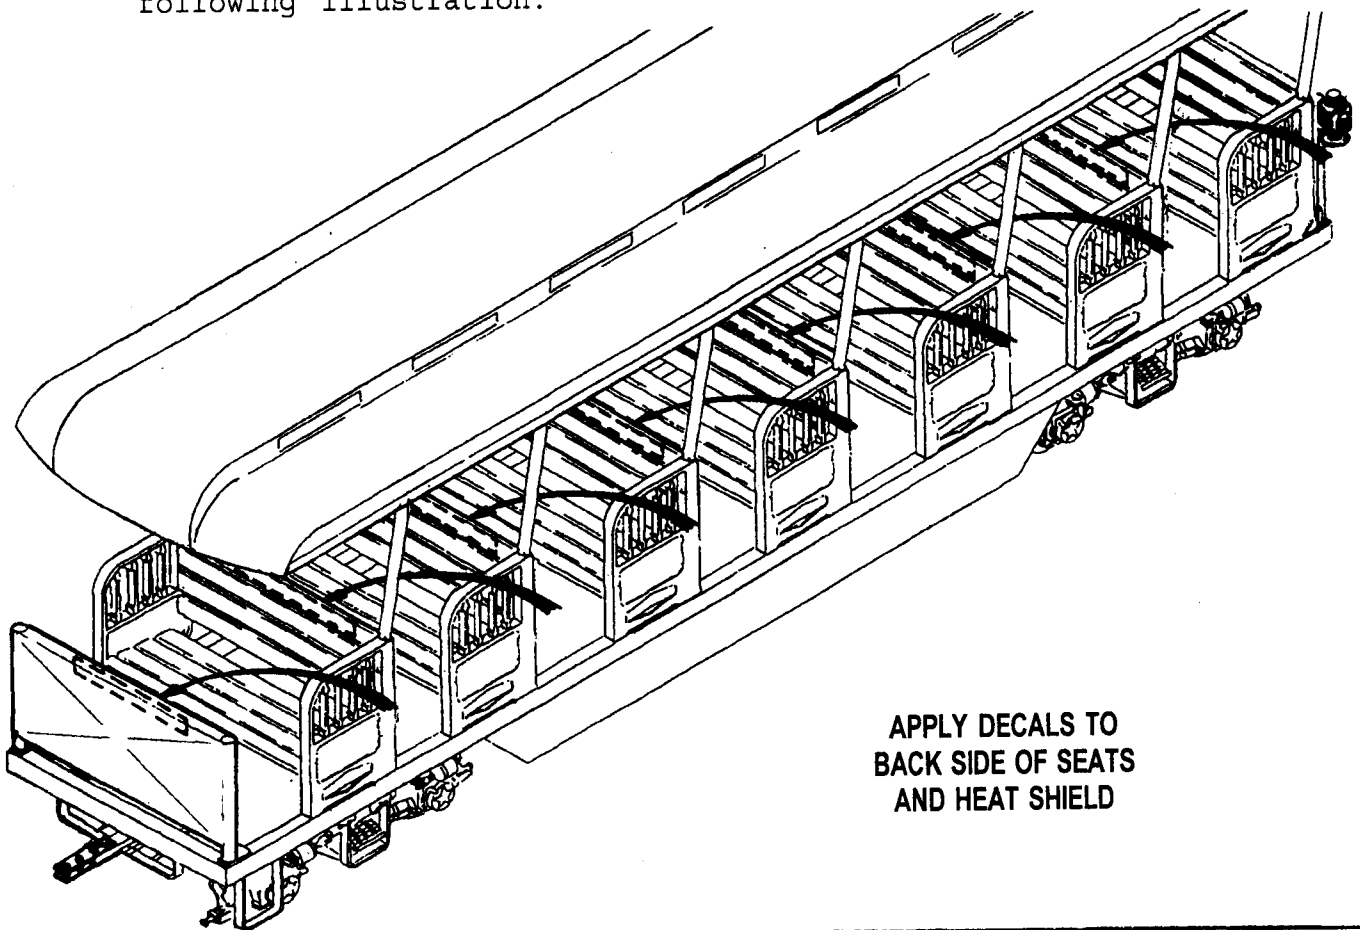

APPLY DECALS TO
BACK SIDE OF SEATS
AND HEAT SHIELD



	CAUTION	
CONTACT WITH MOVING OR STATIONARY OBJECT CAN CAUSE INJURY.		KEEP HANDS, FEET AND ARMS INSIDE COACH AREA.

PLATE & SAFETY DECAL INSTALLATION INSTRUCTIONS
ON COACHES WITHOUT HEAT SHIELDS

1. Attach backing plate to the front railing of each middle and rear coach by drilling three 3/16" diameter holes as shown in the illustration below and riveting the plate in place.
2. A second backing plate for any coach is required when the back seat faces backwards. Use the above procedure for attaching the second backing plate when required.
3. Apply one decal to the backing plate and one to the back of the first six (6) coach seats as shown in the illustration below.

NOTE: Any coach which has the rear seat facing backwards requires decals on only the first five seats.

