



**WISDOM
INDUSTRIES, Ltd.**

July 8, 1993

Dear Sir:

Enclosed are cable clamps and cables to be installed on your Jolly Choo Choo. The Cables are a safety in case the main pivot pipe should break while the ride is operating.

To install the cables, run the cable through the hole in the pipe where the air line runs through. Double it back on itself and clamp with two cable clamps. Try to pull the cable as tight as possible before tightening the clamps.


If you have any questions please give me a call.

Sincerely,


Victor Wisdom
Vice President
Wisdom Industries, Ltd.


DOUBLE CABLE AND
FASTEN WITH 2 CLAMPS

RUN 1/4" x 32"
WIRE ROPE
THROUGH CENTER
OF TUBE
AND FASTEN
SECURELY.

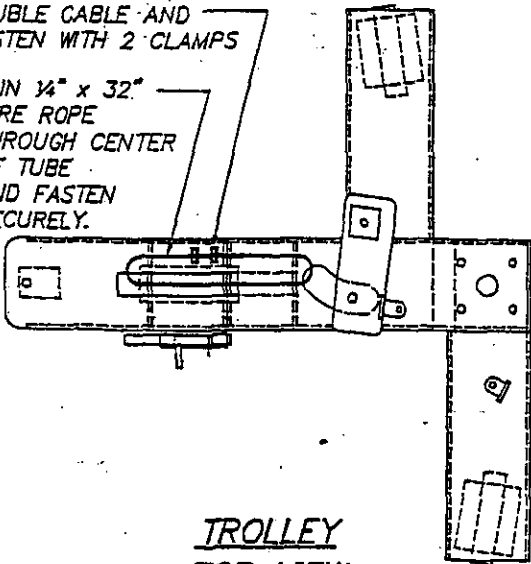

TROLLEY
TOP VIEW
SCALE 1 1/2" = 1'-0"

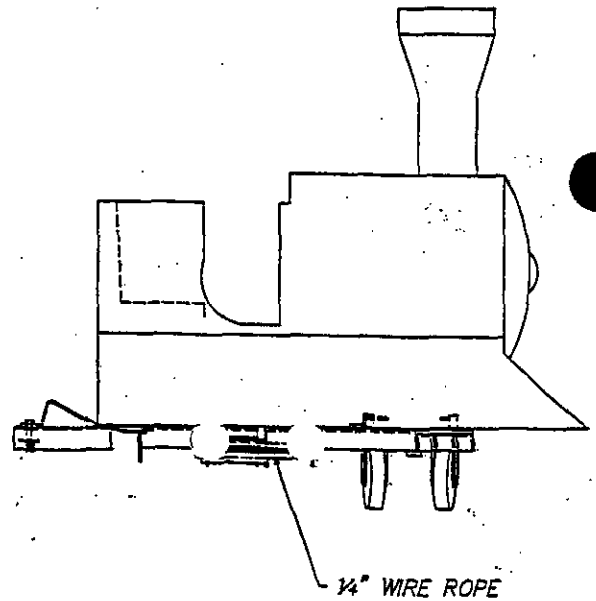

 WISDOM INDUSTRIES Merino, CO 80744	
SCALE 1" = 1'-0"	APPROVED BY:
DATE 7-8-93	REVIEW:
DESCRIPTION TROLLEY SAFETY CABLE	
EQUIPMENT JOLLY CHOO CHOO	